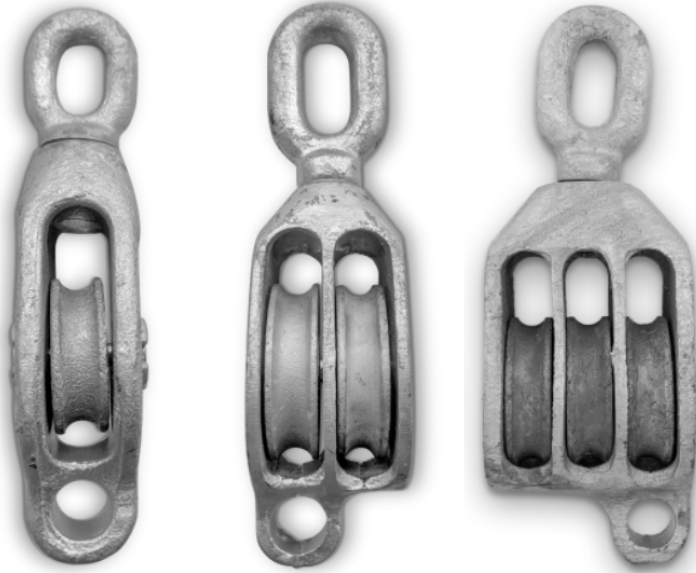


**MALLEABLE PULLEY BLOCK (SWIVEL OVAL EYE)****Data Sheet****Break Load Certified:** ✓**AT A GLANCE**

Technical Specifications	
Material	Galvanised Malleable Iron
Sheave Quantity	Single/Double/Treble Sheave
Colour	Grey
Shell Height (mm)	76 - 203
Sheave Diameter (mm)	45 - 137
Rope Diameter (mm)	12 - 28
Safe Working Load (Tonnes)	0.2 - 1.2
Manufactured In	Far East
Quality Standard	BS 13157 Standard

## SAFE WORKING LOADS (SWL)

Break load test certified.

### Single Sheave

Shell (inches/mm)	SWL (tonnes)	Sheave Dia. (mm)	Rope Dia. (mm)	Weight (kg)
3"/76mm	0.2	45	12	1.0
4"/102mm	0.4	60	16	1.7
5"/127mm	0.5	83	18	2.4
6"/152mm	1	92	24	4.4

### Double Sheave

Shell (inches/mm)	SWL (tonnes)	Sheave Dia. (mm)	Rope Dia. (mm)	Weight (kg)
3"/76mm	0.2	45	12	1
4"/102mm	0.4	60	16	1.7
5"/127mm	0.5	83	18	2.4
6"/152mm	1	92	24	4.4
8"/203mm	1.2	137	28	6.6

### Treble Sheave

Shell (inches/mm)	SWL (tonnes)	Sheave Dia. (mm)	Rope Dia. (mm)	Weight (kg)
4"/102mm	1	60	16	2.8
5"/127mm	1.5	83	18	5.5